



NOTES:
 1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
 3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

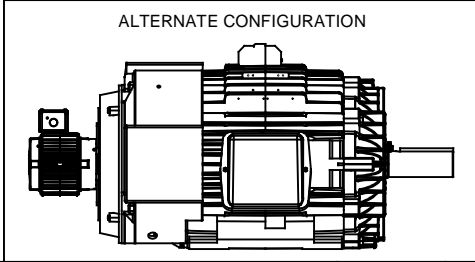

							TOLERANCES UNLESS SPECIFIED		ELECTRIC MOTORS GEARMOTORS AND DRIVES		DRAWN HLB 11-21-2003 CHK JHL 11-21-2003 APPR JES 11-21-2003
							DEC	INCHES			TITLE OUTLINE - TFN 440T FR. - TEBC - AXIAL BLOWER
1 UPDATED FRAME, ADDED ALT. CONFIG. & F2 VIEWS							.XX	±.03	MATL		REF
PER ISAAC 09-5049 AND MU94218							.XXX	±.005			FMF CN 37491
NO REVISION							CHK	ANG ±1/2°	FINISH		PAGE OF
							RFP	11-21-2003	PREV		REV
							NETWORK FILE NAME SS550049LE		SIZE	DRAWING NO	REV
									B	SS550049LE	1

DASH	FRAME	B	C	2F	2XF	BS
1825	444T	17.75	52.85	14.50	- - -	7.25
2025	444/445T	19.75	54.85	14.50	16.50	8.25