

**BALDOR® • RELIANCE**

**Product Information Packet**

**ELECTRIC MOTOR WHOLESAL.COM**

**WDGF1013AG**

**WDF-913-10-B5-G**

Nameplate NP1756				
INPUT H.P.	.728			
RATIO	10	R TORQ-INLB	225	
	WDF-913-10-B5-G			
CAT./SPEC	WDFG1013AG		GR0209C026	
DATE CODE				

Parts List		
Part Number	Description	Quantity
HG0022A13	913 GEAR HOUSING, SYMM SEALED W/NP HOLES	1.000 EA
HA4027A01	SQUARE HEAD PIPE PLUG 1/4" NPTF #304 S.S	1.000 EA
HW5000A51	N5000-156 RETAINER RING (F/S)	2.000 EA
WM0065B02	913 MTZ WORM ASSY 10:1 RATIO 5/8 BORE	1.000 EA
BG6203A01	6203 OPEN,C3,SLUSH	1.000 EA
HW5060A32	RETAINER RING 5160-66 (WALDES)	1.000 EA
HA3555A01	EXPANSION PLUG 1.581/1.577 X 1/4	1.000 EA
HW4600F17	28MM X 40MM X 7MM SGLLIP, HNBR	1.000 EA
GF0003A01	913-3F56 GEAR FLANGE MACHINING 1.33 CD N	1.000 EA
10XN2520S18	1/4-20 X 1.12 HEX HEAD SS	4.000 EA
HW1001S25	WASHER, 1/4 SPLT LK, STAINLESS STEEL	4.000 EA
BS0016A03	913-5 BEARING SUPPORT, OPEN - FOR SYMM H	1.000 EA
GS0049A01	WORMGEAR GASKET, .003 (GREEN), 2.53 ID X	1.000 EA
GS0049A02	WORMGEAR GASKET, .005 (BLUE), 2.53 ID X	2.000 EA
GS0049A03	865MGEAR GASKET, .010 (BROWN), 2.53 ID X	2.000 EA
HW4600C85	SEAL, 0.625 X 1.375 X 0.250 DBLLIP, CR #	1.000 EA
HW4600B39SP	SEAL 0.550 X .790 X .180 FACE SEALING	1.000 EA
10XN2520S12	BOLT 1/4 - 20X 3/4 HEX HEAD SS (F/S)	4.000 EA
SG0014B15	913 WASHDN GEAR SH ASSY 10:1, SGL O/P, W	1.000 EA
BS0047A02	913 BEARING SUPPORT MACH. CLOSED	1.000 EA
GS0049A01	WORMGEAR GASKET, .003 (GREEN), 2.53 ID X	1.000 EA
GS0049A02	WORMGEAR GASKET, .005 (BLUE), 2.53 ID X	2.000 EA
GS0049A03	865MGEAR GASKET, .010 (BROWN), 2.53 ID X	2.000 EA
10XN2520S12	BOLT 1/4 - 20X 3/4 HEX HEAD SS (F/S)	4.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HA3557A01	ALLIANCE #I-5/16 MTG HOLE PLUG (YELLOW)	4.000 EA
MJ1000A90	KLUBERSYNTH UH1-6-460 WORMGEAR OIL	0.050 GA
MJ5019A01	ADHESIVE LOCTITE #680 WAS BAD4525	0.001 EA
MJ5004A35	ADHESIVE LOCTITE #243-31 50 ML	0.001 EA
MJ5001A19	LOCTITE #598 ULTRA BLACK, 50 LB PAIL, IT	0.010 LB
MG1500Y11	707.11A & 707.11B WILKOFASST YELLOW EPOXY	0.030 GA
MG1025W11	PAINT- 781-101 WILKOFASST WHITE EPOXY	0.030 GA
LB5042	TOE TAG, OIL PREFILL KLUBERSYN (250/pk)	1.000 EA
LT0066A08	REDUCER INSTALL/MAINT - KLUBE 11/05	1.000 EA
NP1756	NAMEPLATE, GEAR REDUCER, KLUBERSYNTH UH1	1.000 EA
LB1242	ADHESIVE PATCH 1.10 X 2.03 X .045 THICK	1.000 EA
85XU0208S03	2 X 3/16 DRIVE PIN S.S. (BMH5033)	2.000 EA
MJ1000B01	ANTISEIZE - ALTEMP Q NB 50, 750 GRAM CAN	0.001 EA
HA3556A01	WORM BORE PLUG 5/8 BORE, CAPPLUGS 7TX	1.000 EA
35PA1000	PACKING GROUP	1.000 EA
HW2502D10	KEY, 3/16 SQ X 1.000 SS	1.000 EA
10XN3816S16	3/8-16 X 1 HEX HD CAP SCREW, STAINLE	4.000 EA
HW1001S38	WASHER, 3/8 SPLT LK, STAINLESS STEEL	4.000 EA
MP1009A01	4 X 4 ZIP POLYBAG, 4 MIL	1.000 EA

Accessories		
Part Number	Description	Multiplier
WDB13H71	WASHDOWN BASE-HORIZONTAL POS. A/B 913	A8

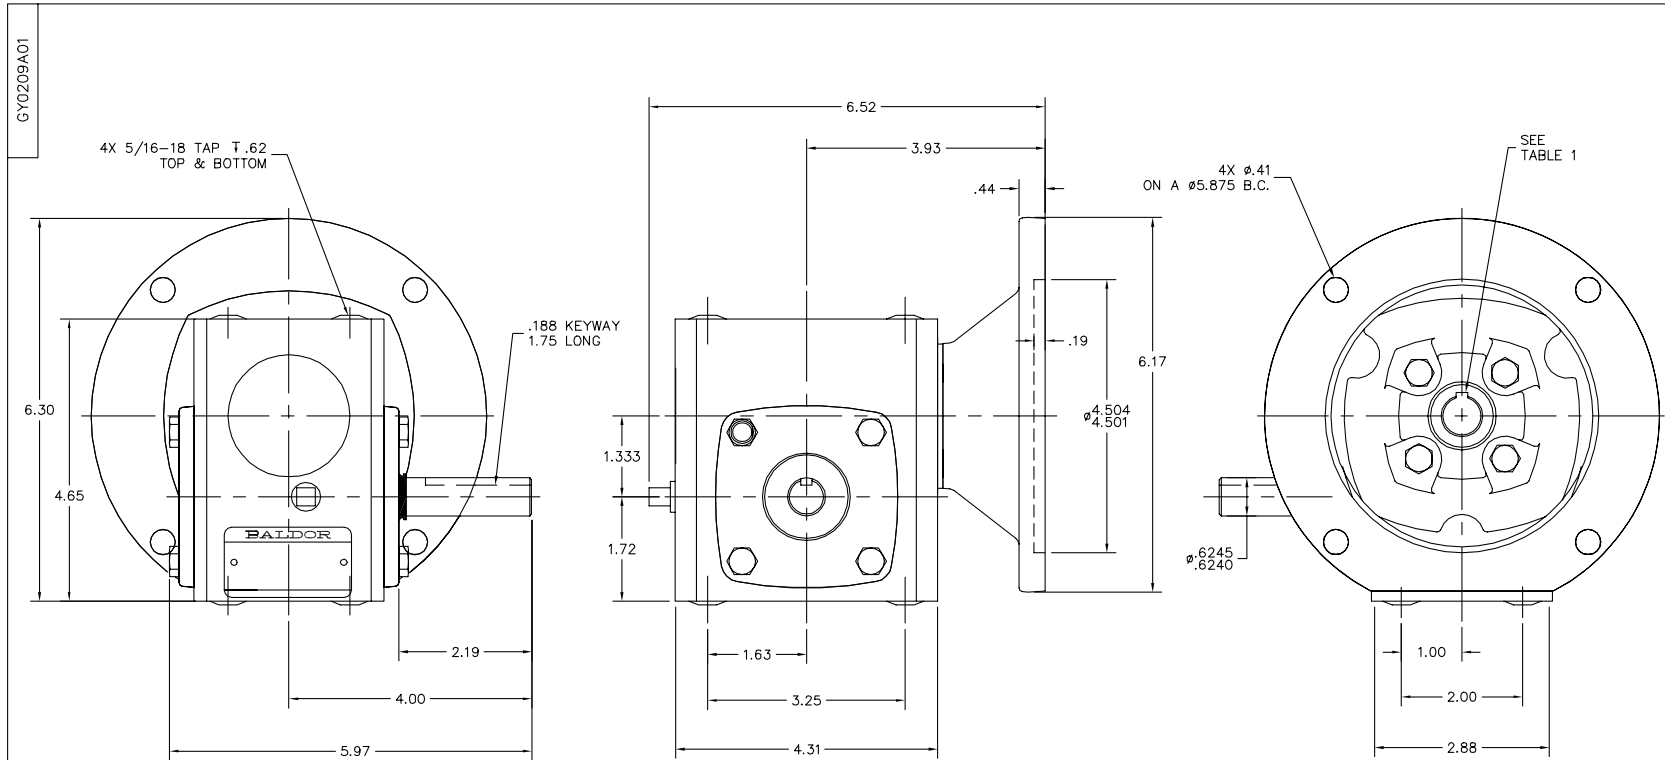


TABLE 1:

	BORE	KEYWAY
B5	.625	.188
B7	.875	.188

CUST. NAME:		CUST. P.O.:		REV. DESC: REMOVE WASHDOWN LABEL	
MODEL:		CATALOG/SPEC NO.:		REV. LTR: B	VERSION: 02
RATIO:		MAX. INPUT HP:	OUTPUT TORQUE:	FILE: \CKA\00009\611	REVISED: 08:23:23 05/31/2007
RATINGS ARE AGMA CLASS 1 SERVICE AT 1750 RPM INPUT		CERTIFIED BY:		MTL: -	BY: CKGLEHO

**BALDOR ELECTRIC Co.**

WDF-913-G STANDARD MOUNTING

GY0209A01

P. O. BOX 2400 • FORT SMITH, ARKANSAS 72902-2400 U.S.A. • (479) 646-4711 • FAX (479) 648-5792



## REDUCER INSTALLATION, MAINTENANCE AND LUBRICATION


Baldor reducers achieve maximum performance and life when installed properly. Please follow these instructions carefully.

### INSTALLATION

Baldor reducers filled with Kluber Klubersynth UH1-6-460 synthetic lubricant are ready for immediate use. These reducers are completely sealed and require no breather vents. The design and synthetic lubrication allow efficient operation to reduce operating temperature and minimize internal pressure build up. The reducer has been filled with the correct amount of oil for all approved mounting positions. Do not add or remove any oil during installation or after the break-in period.

Mount the reducer on a flat surface, to assure proper bolt tension and prevent damage to the mounting base. When direct coupling the reducer to the driven machine, carefully align the reducer output shaft to the input shaft of the driven machine. These shafts must be connected with a flexible coupling.

Power transmission components, such as sprockets, gears, or sheaves, mounted on the reducer shafts produce overhung loads. Mount these components as close as possible to the reducer with the hub facing outward. This mounting minimizes the load on the reducer shaft and bearings for increased life. Carefully align these components with their counterparts on the driven machine.



### MAINTENANCE

Baldor reducers require no periodic maintenance. Visual inspection (for oil leakage and general operating condition) and a simple cleaning to remove dirt build up is recommended.

Accumulation of material on the reducer can lead to overheating and reduced life.

### LUBRICATION

Klubersynth UH1-6-460 is suitable for USDA Class H1 environments. This synthetic lubrication does not require periodic changing. The lubrication should only be replaced when maintenance is performed that requires disassembly. Use only Klubersynth UH1-6-460. This lubrication is suitable for a wide temperature range (-13° to 320° F). However, refer to “Operating Environment” section for the ambient operating temperature for Baldor speed reducers.

### MOUNTING POSITIONS

Because Baldor speed reducers do not require a breather vent, they are suitable for mounting in a wide variety of mounting positions without modification.

Avoiding those positions where the high-speed (input) oil seal is immersed in oil, will provide greater security against high-speed (input) seal wear. For maximum seal life, the reducer should be mounted with the high-speed (input) shaft as high as possible above the low-speed (output) shaft. Since the high-speed (input) oil seal experiences more revolutions than the output, it will also experience more heat and more wear. When the speed reducer is mounted in a manner where the high-speed (input) seal is below the oil level, and the seal is nearing the end of its useful life, the steady head of oil on the seal will result in a leak. If the reducer is mounted with the high-speed (input) seal above the oil level it may not leak even when the seal has reached the end of its useful life.


### OPERATING ENVIRONMENT

Baldor Reducers are designed to operate in ambient temperatures of -10°F to 100°F. The oil sump temperature of the reducer must not exceed 200°F. Consult the factory for applications requiring ambient operating temperature outside this range.


The input horsepower rating shown on the nameplate of each Baldor speed reducer is the continuous mechanical rating of 1.0 service factor at 1750 RPM. Before placing the reducer into service, confirm that its horsepower rating is consistent with the motor horsepower and desired service factor. Service factor and speed reducer ratings can be found in your Baldor Gear Product brochure, BR1600.

**“C” FLANGE – HOLLOW BORE WORM STYLE:**

**STEP 1.** Position key in reducer worm bore.  
**STEP 2.** Apply anti-seize compound to the motor shaft.  
**STEP 3.** Line up the key with the key slot and slip the motor shaft in the reducer worm bore.

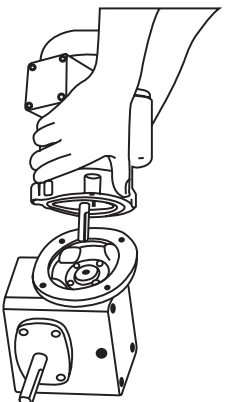

**STEP 4.** Install the four supplied bolts and lock washers and tighten bolts evenly for a solid fit between motor and “C” flange.



**EXTENDED “C” FLANGE WITH FLEXIBLE COUPLING STYLE:**

- STEP 1.** Mount one coupling half on motor shaft so that the coupling half and end of key are flush with end of motor shaft. (See Drawing A).
- STEP 2.** Tighten coupling setscrews. (Thread locking compound is recommended on all coupling setscrews.)
- STEP 3.** Measure the distance from inner face of coupling to motor mounting surface. (See Drawing A “L”).
- STEP 4.** Mount other coupling half on the reducer input shaft so the coupling end measures the same distance “L” to the mounting surface of the “C” flange. (See Drawing B “L”)
- STEP 5.** Tighten setscrews.

Follow the lubrication directions.

